

inserts:	page
CD	64 poles + ⊕
CDD	108 poles + ⊕
CQE	46 poles + ⊕
CN	24 poles + ⊕
CCE	24 poles + ⊕
CNE, CSE.....	24 poles + ⊕
CSS	24 poles + ⊕
CMSE	10+2 (aux) poles + ⊕
CMCE	10+2 (aux) poles + ⊕
CX	4/8 poles + ⊕
MIXO	6 modules
	137÷151

insert centre distance:

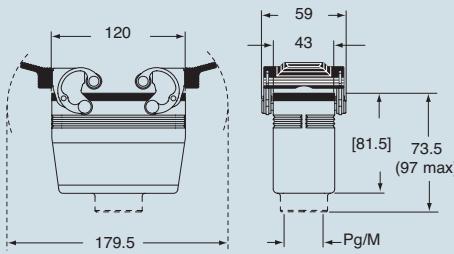
104 x 27 mm

hoods
with 2 levershoods
with single lever

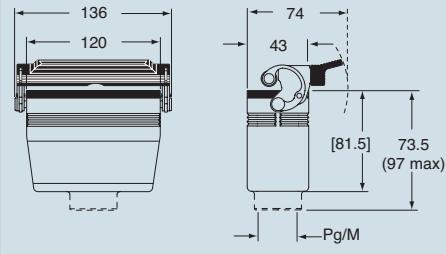
description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with levers and gasket, top entry	CHV 24 G	21	MHV 24 G32	32	CHV 24 LG	21	MHV 24 LG32	32
with levers and gasket, top entry, high construction	CAV 24 G	21	MAV 24 G25	25	CAV 24 LG21	21	MAV 24 LG25	25
with levers and gasket, top entry, high construction	CAV 24 G29	29	MAV 24 G32	32	CAV 24 LG29	29	MAV 24 LG32	32
with levers and gasket, top entry, high constr., without adaptor *	CFV 24 G	21	MFV 24 G25	25	CFV 24 LG21	21	MFV 24 LG25	25
with levers and gasket, top entry, high constr., without adaptor *	CFV 24 G29	29	MFV 24 G32	32	CFV 24 LG29	29	MFV 24 LG32	32

* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.

dimensions in mm

CHV G (CAV G) and [CFV G],
MHV G (MAV G) and [MFV G]

dimensions in mm

CHV LG (CAV LG) and [CFV LG],
MHV LG (MAV LG) and [MFV LG]

Type
4/4X/12

dimensions indicated are not binding
and may be changed without notice